

SWEEPERS - RIDER

1404

The 1404 Sweeper features a wide range of standard accessories. With a choice of 3 different brushing methods, the 1404 Sweeper is equipped to tackle any cleaning challenge thrown at it.

MOST FREQUENT USE

RETAIL



HOSPITALITY



CLEANING CONTRACTORS



EDUCATION



MAX PRODUCTIVITY

82,000 ft²/h

BATTERY RUN TIME

2.0-4.7 h

KEY SPECS

58" cleaning path
40 gal capacity



FOLDABLE HANDLE



CARPET KIT



EASY TO USE CONTROLS




INNOVATIONS





SLS™ SELF-LEVELLING SYSTEM

SLS™ System can be electric or mechanical and allows great cleaning performances thanks to a constant pressure on the floor.

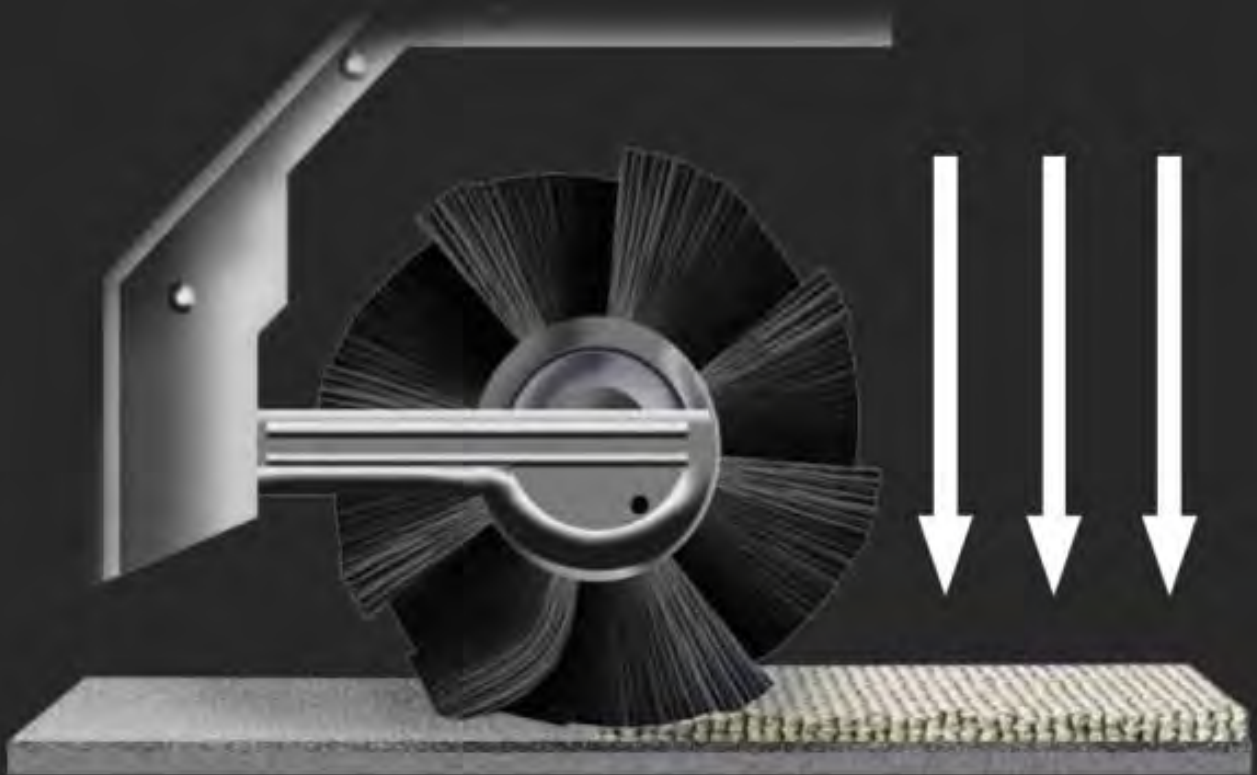

1404

.01 HIGH DUMP OF
DEBRIS



.02 SELF-LEVELING
BRUSH

.03 LARGE HOPPER CAPACITY

Other Features

- NDC (No Debris in Curve) Automatic brush movement while turning to eliminate debris passing between the side brush and the main brush
- Large sweeping path
- SLS (Self Leveling System) automatic brush pressure control
- Dust micro filtration
- Dust flap for large debris collection
- Pre-programmed working settings
- Adjustable side brush rpm
- Easy to use control panel
- Great working visibility
- Effective discharge system due to separate controls for hopper raise and tilting
- Automatic stop (by pedal release) in working mode
- Maximum distance from discharge point and operator
- Main brush replacement without tools

1404

		1404	1404 DUAL POWER
Max working width	in/ mm	58"/ 1450 mm	58"/ 1450 mm
Main brush width	in/ mm	32"/ 800 mm	32"/ 800 mm
Highest productivity	ft ² /h - m ² /h	82,290 ft ² / 7,644 m ²	82,290 ft ² / 7,644m ²
Dirt container volume	gal	40 gal/ 50 l	40 gal/ 150 l
Weight	lbs/ kg	1,025 lbs/ 465 kg	1,025 lbs/ 465 kg
Dimensions	inches	63 x 43 x 51	63 x 43 x 51
Power supply		24 (4x6)	Dual Power
Filtering surface	ft ² / m ²	65 ft ² / 6 m ²	65 ft ² / 6 m ²
Electric filter shaker		Automatic	Automatic
Max dumping height	Inches/ mm	56"/ 1430 mm	56"/ 1430 mm
Noise level	dB	63 dB	82 dB

AVAILABLE ACCESSORIES

6V325 AH BATTERY
6V325



12V210 AH BATTERY
12V210



6V225 AGM BATTERY
6V225-AGM



6V330 AGM BATTERY
6V330-AGM



CHARGER WET/GEL
BACA00136



BATTERY WATERING SYSTEM
CR-BWS-L-4



GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft ² / h	Maximum Theoretical ft ² /charge	Ft ² charge efficiency (70%)
TK1404E	6v 325ah Battery	4.5	82,290	370,304	259,213
TK1404E	6v 225 AGM Battery	2.0	82,290	164,580	115,206
TK1404E	6v 330 AGM Battery	4.7	82,290	386,762	270,733

800-635-0298
sales@controlledairdesign.com
www.controlledairdesign.com