

Sales and service: (800) 635-0298
sales@controlledairdesign.com



DEPURECO INDUSTRIAL VACUUMS SRL

DUTTON RD SAN MARCOS, TEXAS, U.S.A. 78666.
TEL. +1 512-827-3701
DEPURECO@DEPURECO.COM WWW.DEPURECOUSA.COM

 @DEPURECOINDUSTRIALVACUUMS

 @DEPURECO INDUSTRIAL VACUUMS



#JUSTSTOPCLEAN



COMPACT EXTRACTOR



MANUAL SHAKER

STUDIED FOR SHAVINGS, GRANULES AND WET MATERIALS ·
HAND SHAKER SYSTEM FOR STAR FILTER CLEANING ·




SIMPLE AND EFFICIENT




PSC SYSTEM

STUDIED FOR SHAVINGS, GRANULES AND WET MATERIALS ·
SEMI - AUTOMATIC HAND SHAKER SYSTEM FOR STAR FILTER CLEANING ·



EFFICIENT AND RELIABLE

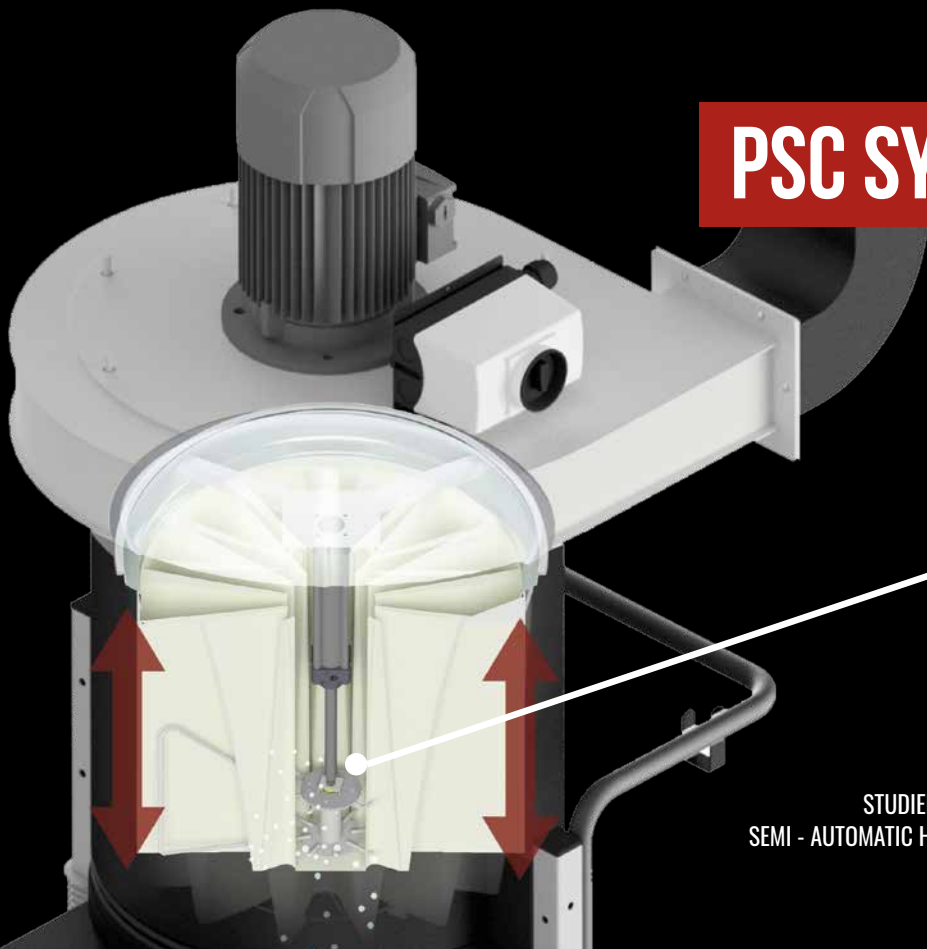

SP-SYSTEM

THE SP SYSTEM ALLOWS TO KEEP THE FILTER CLEAN
AUTOMATICALLY WITHOUT STOPPING THE VACUUM.
EACH FILTER IS CLEANED PERIODICALLY WITH A
COMPRESSED AIR JET.

THE SP SYSTEM IS PERFECT FOR LARGE QUANTITIES
OF FINE AND DIFFICULT DUSTS.



CYCLICAL PROGRAMMER INSTALLED
ON THE VACUUM THANKS TO THE TOUCHSCREEN
IT IS POSSIBLE TO SET THE CLEANING CYCLE AND
ADJUST THE SYSTEM ACCORDING TO THE QUANTITY
AND THE KIND OF POWER.



CLEANING
THE FILTER
IS IMPORTANT

DF075



DF075

DF22



DF22

POWER	HP	1.5
VOLTAGE FREQUENCY	V Hz	480 60
MAXIMUM VACUUM	inH2O	9.84 9.25 5.51
AVAILABLE STATIC INLET PRESSURE	inH2O	9.84 8.66 3.93
MAXIMUM AIR FLOW	CFM	264 547 883
INLET	Ø in	2.76 3.94 4.72
SURFACE AREA	in²	3720
FILTRATION EFFICIENCY		CLASSE EN 60335-2-69 - M CLASS (1µ)
BIN CAPACITY	gal	17 / 26

POWER	HP	3.45
VOLTAGE FREQUENCY	V Hz	480 60
MAXIMUM VACUUM	inH2O	14.2 14.9 14.2
AVAILABLE STATIC INLET PRESSURE	inH2O	14.2 14.5 13.7
MAXIMUM AIR FLOW	CFM	265 589 753
INLET	Ø in	3.94 4.72 5.90
SURFACE AREA	in²	3720
FILTRATION EFFICIENCY		CLASSE EN 60335-2-69 - M CLASS (1µ)
BIN CAPACITY	gal	17 / 26

STANDARD M CLASS STAR FILTER
SUITABLE FOR ALL NEEDS



PSC
SEMI-AUTOMATIC
PNEUMATIC
FILTER SHAKER



SP
SYSTEM
AUTOMATIC
REVERSE
JET CLEANING
SYSTEM



ABSOLUTE FILTER
HEPA H14

FILTRATION EFFICIENCY
OF 99,995 % OVER 0,18 µ



3 YEARS
WARRANTY
ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

DF40



DF40

DF55



DF55

POWER HP
VOLTAGE | FREQUENCY V|Hz
MAXIMUM VACUUM inH2O
AVAILABLE STATIC INLET PRESSURE inH2O
MAXIMUM AIR FLOW CFM
INLET Ø in
SURFACE AREA in²
FILTRATION EFFICIENCY
BIN CAPACITY gal

6.2
480 60
18.5 15.7 10.6
18.1 13.7 7.8
589 1295 1883
5.90 7.09 7.87
6975
CLASSE EN 60335-2-69 - M CLASS (1µ)
17

POWER HP
VOLTAGE | FREQUENCY V|Hz
MAXIMUM VACUUM inH2O
AVAILABLE STATIC INLET PRESSURE inH2O
MAXIMUM AIR FLOW CFM
INLET Ø in
SURFACE AREA in²
FILTRATION EFFICIENCY
BIN CAPACITY gal

DF FIX 55	DF FIX 75
8.5	9
480 / 60	480 / 60
25.9	39.7
25.2	21.2
1589	2472
7.87	7.87
6975	6975
CLASSE EN 60335-2-69 - M CLASS (1µ)	CLASSE EN 60335-2-69 - M CLASS (1µ)
46	46

STANDARD M CLASS STAR FILTER
SUITABLE FOR ALL NEEDS



PSC
SEMI-AUTOMATIC
PNEUMATIC
FILTER SHAKER



SP
SYSTEM
AUTOMATIC
REVERSE
JET CLEANING
SYSTEM



SUCTION
ARM

ABSOLUTE FILTER
HEPA H14

FILTRATION EFFICIENCY
OF 99,995 % OVER 0,18 µ



3 YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

DISCHARGE
SYSTEMS



BALANCED
FLAP



DISCHARGE
SYSTEMS




MANUAL
DISCHARGE
BUTTERFLY VALVE



DOUBLE
ELECTRO
PNEUMATIC
DISCHARGING
BUTTERFLY VALVE



ROTATING
LEVEL SENSOR

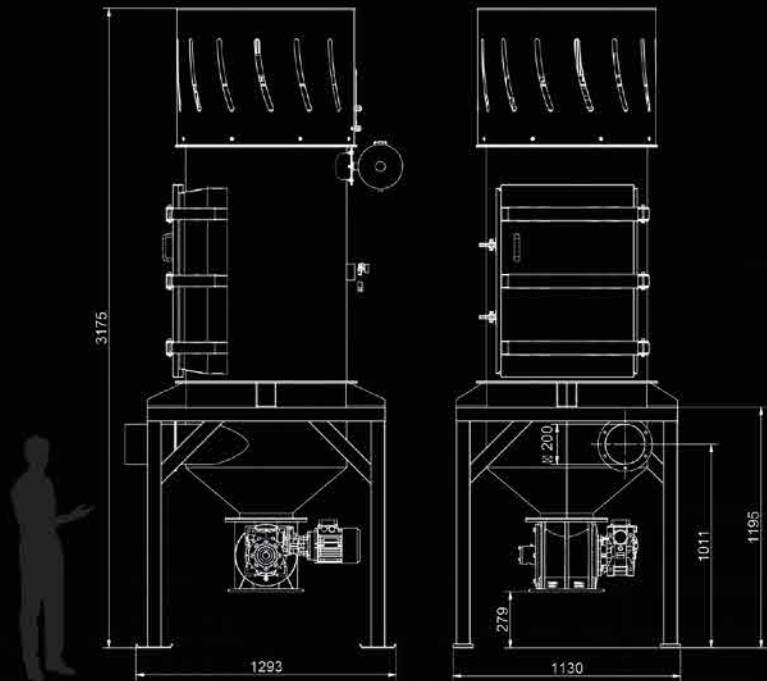

DV AIR FLOW

		DV-AIR AF 40	DV-AIR AF 55
POWER	HP	6,2	8,5
VOLTAGE FREQUENCY	V Hz	480 60	480 60
MAXIMUM VACUUM	in	18.5	25.9
AVAILABLE STATIC INLET PRESSURE	in	18.1	25.2
MAXIMUM AIR FLOW	CFM	1295	1589
INLET	Ø in	7.87	7.87
SURFACE AREA	in ²	52700	52700
FILTRATION EFFICIENCY		CLASSE EN 60335-2-69 - M CLASS (1µ)	CLASSE EN 60335-2-69 - M CLASS (1µ)



SP
SYSTEM
AUTOMATIC
REVERSE JET CLEANING
SYSTEM



3YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

FILTER SOLUTIONS

TYPE OF FILTERS

"M" CLASS STAR FILTER



FINE DUSTS, GRANULES, SHAVINGS AND DRY MATERIALS

ANTISTATIC "M" CLASS STAR FILTER



FINE DUSTS, GRANULES, SHAVINGS AND MATERIALS TENDING TO BE ELECTROSTATICALLY CHARGED. STANDARD ON ALL ATEX MODELS

NOMEX STAR FILTER



DUSTS AND SOLIDS WITH TEMPERATURES UNTIL 250°C

ACTIVATED CARBON FILTER




8KG ACTIVATED CARBON ELIMINATES BAD SMELLS

PTFE STAR FILTER



VERY FINE AND CLOGGING DUSTS, HYGROSCOPIC AND WET MATERIALS, CERTIFIED FOR FOOD

M CLASS CARTRIDGE

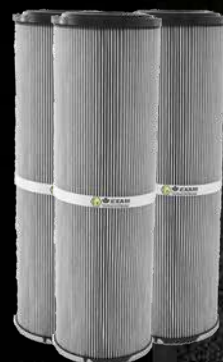


LARGE QUANTITIES OF FINE AND CLOGGING DUSTS, AVAILABLE ON ALL SP VERSIONS, AUTOMATIC REVERSE JET CLEANING



FILTRATION EFFICIENCY OF 99,995 % OVER 0,18 µ

SUCTION ARMS

TYPE OF ARMS

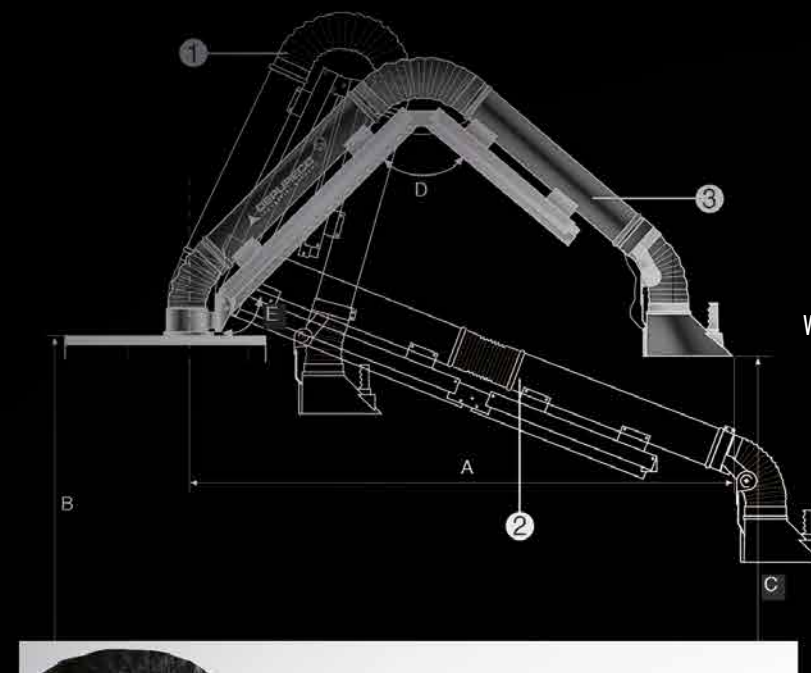

TROLLEY VERSION

CLOSED ARM 1 25 IN

OPEN ARM 2 102 IN

WORKING POSITION 3 90.5 IN

ARTICULATED ARM
L = 12 06 IN

CE II 2 G/D

ARTICULATED ARM
L = 12 06 IN

