

PNEUMATIC DRUM TOP VAC



TURN A 55 GALLON DRUM INTO
THE BEST VACUUM YOU'LL EVER OWN

FOR OVER 25 YEARS, THE CAD DRUM
TOP VACUUM FROM INDUSTRIAL VACUUM HAS
SET THE STANDARD FOR POWER, DURABILITY
CONVENIENCE AND EFFECTIVENESS.

Controlled Air Design, LLC
Dust Collection and Vacuuming Solutions for
OSHA and NFPA Compliance.
www.controlledairdesign.com 919 607 6765

USER-FRIENDLY & ADAPTABLE

THE CAD DRUM TOP VACUUM HAS BEEN
USED FOR LEAD PAINT REMOVAL ON THE
CAPITOL BUILDING IN WASHINGTON, THE
BROOKLYN BRIDGE, BY NASA, UTILITIES
INCLUDING TVA, THE MILITARY AND
PRIVATE INDUSTRY FOR ALL TYPES OF
PLANT MAINTENANCE.

IDEAL FOR ASBESTOS, LEAD AND OTHER
SENSITIVE MATERIAL CLEAN UP.

EXCLUSIVE DUAL PRE-FILTRATION

A DOUBLE STAGE, TWO-CARTRIDGE FILTER
SYSTEM DESIGN THAT IS EASILY CLEANED OR
CHANGED TO PROTECT THE OPTIONAL FINAL
HEPA FILTERING STAGE FOR MAXIMUM VACUUM
POWER.

EACH HEPA FILTER IS RATED AT 99.97%
EFFICIENCY AT .3 MICRONS AND MEETS OR
EXCEEDS OSHA & CLEAN AIR ACT STANDARDS.

INCLUDES A TEN-FOOT VACUUM HOSE,
54 INCH WAND AND FLOOR TOOL.



*Drum and Dolly sold separately.



AVAILABLE IN ELECTRIC OR PNEUMATIC MODELS.
WET OR DRY OPERATION STANDARD.


DRUM TOP VAC PNEUMATIC MODELS




**SINGLE-VENTURI VACUUM
DT55AP**



**SINGLE-VENTURI VACUUM
WITH FINAL HEPA FILTER
DT55APH**

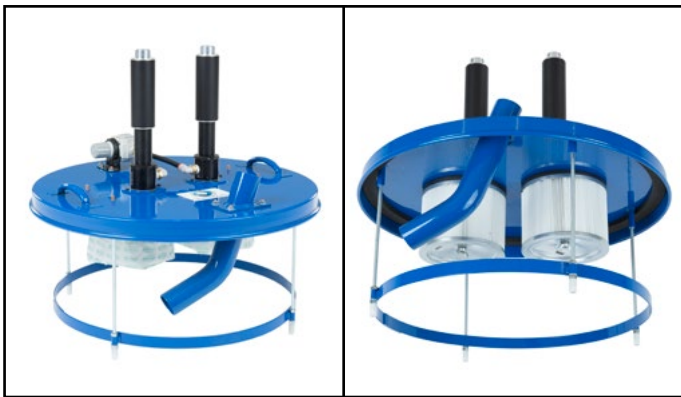

**DOUBLE-VENTURI VACUUM
DT255AP**

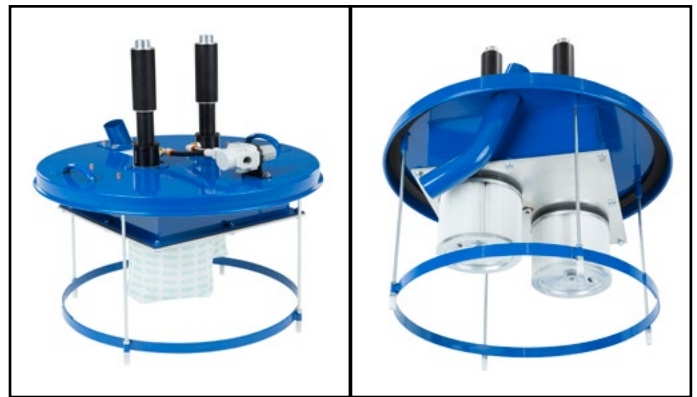

**DOUBLE-VENTURI VACUUM
WITH FINAL HEPA FILTER
DT255APH**

FEATURES & OPTIONS

- DURABLE POWDER-COAT FINISH
- OPTIONAL HEPA FILTRATION
- ATTACHMENTS & ACCESSORIES

Pneumatic	Air Input Requirements	Air Flow	Inches of Hg	Filtration	Tool Kit
DT55AP	70 CFM @ 65 PSI	110 CFM	12"	STD	1.5 or 2"
DT55APH	70 CFM @ 65 PSI	110 CFM	12"	HEPA	1.5 or 2"
DT255AP	140 CFM @ 65 PSI	210 CFM	12"	STD	1.5 or 2"
DT255APH	140 CFM @ 65 PSI	210 CFM	12"	HEPA	1.5 or 2"

*All models require a 1/2" I.D. air line and fittings



Controlled Air Design, LLC
Raleigh, NC
919-607-6765

